

### HOUSING

- 1. MINIMAL RECESSED HEIGHT**  
Shallow 3.5" Housing Provides Maximum Plenum Clearance
- 2. ONE-PIECE EXTRUDED ALUMINUM HOUSING**  
One-Piece Extruded Aluminum Housing Ensures Straighter Rows and Consistent Lens Retention
- 3. MULTIPLE CEILING SYSTEMS**  
Engineered to be Installed within Multiple Ceiling Applications; See Options Below for Available Mounting Types


### OPTICAL SYSTEM

- 4. EVENLY ILLUMINATED ARCHITECTURAL LENS**  
Architectural Grade Diffuser is Utilized to Establish Optimal Aesthetic Value without Sacrificing High Efficiency Light Output.
- 5. VERSATILE LIGHT ENGINE**  
Multiple Lumen Intensities Provide the Correct Level of Illumination Within Each Space


### ELECTRICAL

- 6. 0-10 VOLT DIMMING TO 1% STANDARD**

LIGHT DISTRIBUTION

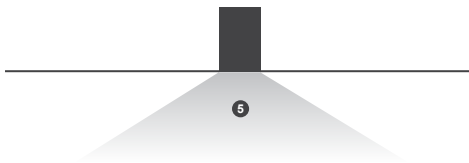

CROSS-SECTION



SERIES	LENGTH <sup>1</sup>	OUTPUT <sup>2</sup>	RATIO <sup>3</sup>	VOLTAGE	CCT	MOUNTING	COLOR <sup>5</sup>	DIRECT OPTICS	ORDERING
									OPTIONS
<b>R 3</b>			<b>01</b>	<b>UNV</b>			<b>W</b>	<b>SD</b>	<b>QS</b>
	<b>XXX</b> FT <small>2 INCREMENTS STARTING AT 4' EX: 4' = 004</small>	<b>H2</b> 1200 LM/FT <b>H1</b> 1000 LM/FT <b>H</b> 800 LM/FT <b>M</b> 600 LM/FT <b>L</b> 400 LM/FT	<b>01</b> 0/100	<b>UNV</b> <small>120-277 Volt</small>	<b>30</b> 3000K <b>35</b> 3500K	<b>T1</b> 1" T GRID <b>T9</b> 9/16" T GRID <b>TG9</b> 9/16" T-TEG GRID <b>SC</b> SCREW SLOT GRID	<b>OF</b> OVERLAP FLANGE <b>W</b> WHITE	<b>SD</b> SYMMETRICAL DOWN LIGHT	<b>QS</b> QUICKSHIP

<sup>1</sup>Nominal length; 4' Minimum Length

<sup>2</sup>Nominal lumens per foot

<sup>3</sup>Ratio defined as percentage of light illuminated upwards versus percentage of light illuminated downwards



SPECIFICATIONS

### MECHANICAL

#### Housing Construction:

Extruded Aluminum 6063-T5 alloy outer housing with die-formed steel internal components for strength, alignment and mounting attachment.

#### Alignment/Assembly:

The Sure-Fit alignment system employs a four-point alignment and attachment method, designed to create straighter rows and minimize seams between sections (field assembled). Two alignment tabs ensure the outer extruded aluminum rails are aligned, while two draw-screws secure housing-to-housing attachment.

#### Lengths:

The QuickShip R3 is available in 2-foot (24") lengths starting at 4-feet (48"). Longer fixture rows are available and will be configured per Lumato factory specifications.

#### Mounting Method/Hardware:

The QuickShip R3 is designed for lay-in grid ceilings or "Hard" sheet rock construction.

#### Exterior Finish:

The QuickShip R3 is available in White polyester powder coat finish to ensure durability.

### OPERATION

#### Light Engine:

The QuickShip R3 is available in 3000K & 3500K CCT within a 2.5-Step MacAdam Ellipse and has a standard CRI of 80+.

#### Optics:

The back lit extruded acrylic lens ensures high efficiency light output, in a minimal form factor for a clean, evenly illuminated lower surface with minimal glare.

#### Electrical:

Class 2 programmable (factory pre-set) premium power supply, 120-277VAC input. Power factor >0.9. THD <15%. Integral Surge Protection to 2KV.

#### Dimming:

The QuickShip R3 comes standard with 0-10V dimming. The 0-10V control allows dimming down to 1%.

### GENERAL

#### Warranty:

Five (5) year limited warranty from date of shipment, covers LED's, driver, and luminaire.

#### Lumen Maintenance:

Rated for 85% initial lumen output (L85) at 50,000 Hours of operation, operated at 25C ambient temperature; per TM-21 Guidelines published by the Illuminating Engineering Society (IES).


#### Certification

All luminaires are UL and cUL Listed, approved for Dry/Damp locations

#### Made in the USA

All Lumato Luminaires and Components (with the exception of our LED boards and drivers) are proudly manufactured and assembled in the USA.


MOUNTING OPTIONS

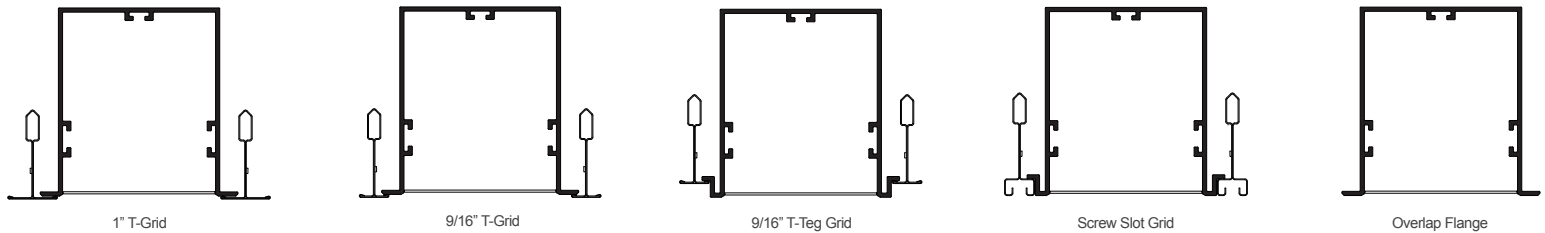

PHOTOMETRICS

### R3-4-M-01-12-30-XX-X

Total Lumens: 2,321  
 Ratio: 0% Up and 100% Down  
 Wattage: 22.50  
 Efficacy: 103.2 (Lumens Per Watt)  
 Fixture Length: Four Feet

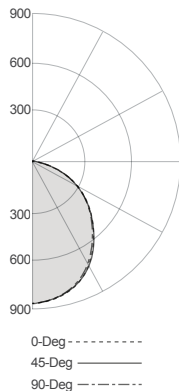

#### Zonal Lumen Summary

Zone	Lumens	% Fixt
0 - 30	666	28.7
0 - 40	1072	46.2
0 - 60	1842	79.4
0 - 90	2321	100.0
90 - 180	0	0.0
0 - 180	2321	100.0

#### Coefficients Of Utilization

RC	80				70				50			
	RW	70	50	30	10	70	50	30	10	50	30	10
0	119	119	119	119	116	116	116	116	111	111	111	111
1	109	104	100	96	106	102	98	94	97	94	91	91
2	99	91	84	78	96	89	83	77	85	80	76	76
3	90	80	72	65	88	78	71	65	75	69	63	63
4	83	71	62	55	80	70	61	55	67	60	54	54
5	76	63	54	48	74	62	54	48	60	53	47	47
6	70	57	48	42	69	56	48	42	54	47	41	41
7	65	52	43	37	64	51	43	37	50	42	37	37
8	61	47	39	33	59	47	39	33	45	38	33	33
9	57	44	35	30	56	43	35	30	42	35	30	30
10	53	40	32	27	52	40	32	27	39	32	27	27

ENERGY CONSUMPTION

#### Watts Per Linear Foot

	H2:1200	H1:1000	H:800	M:600	L:400
0/100	12.53	9.575	7.83	5.63	4.03
Lumens/Ft.	1,229.00	957.25	786.75	580.25	399.75
Lumens/W	98.1	100.0	100.5	103.2	99.3